

Instruction and Operation Manual

S020

Temperature Transmitter



Dear Customer,

Thank you for choosing our product.

The operating instructions must be read in full and carefully observed before starting up the device. The manufacturer cannot be held liable for any damage which occurs as a result of non-observance or non-compliance with this manual.

Should the device be tampered with in any manner other than a procedure which is described and specified in the manual, the warranty is cancelled and the manufacturer is exempt from liability.

The device is destined exclusively for the described application.

SUTO offers no guarantee for the suitability for any other purpose. SUTO is also not liable for consequential damage resulting from the delivery, capability or use of this device.

Revision: 2024-1




Last modifications: April, 2024

Table of contents

1 Safety Instructions.....	4
2 Registered Trademarks.....	6
3 Application.....	7
4 Features.....	7
5 Technical Data.....	7
5.1 General.....	7
5.2 Electrical Data.....	7
5.3 Output Signals.....	8
5.4 Accuracy	8
6 Dimensional Drawing.....	8
7 Determination of the Installation Point.....	8
8 Installation	9
8.1 Installation Requirements.....	9
8.2 Installation Procedure	9
8.3 Electrical Connection	10
9 Signal Outputs.....	11
10 Optional Accessories.....	11
10.1 Compression Fitting	11
11 Calibration.....	11
12 Maintenance.....	11
13 Disposal or Waste.....	11

1 Safety Instructions



Please check if this instruction manual accords to the product type.

Please observe all notes and instructions indicated in this manual. It contains essential information which have to be observed before and during installation, operation and maintenance. Therefore this instruction manual has to be read carefully by the technician as well as by the responsible user / qualified personnel.

This instruction manual has to be available at the operation site of the temperature transmitter at any time. In case of any obscurities or questions, regarding this manual or the product, please contact the manufacturer.



WARNING!

Compressed air!

Any contact with quickly escaping air or bursting parts of the compressed air system can lead to serious injuries or even death!

- Only use pressure tight installation material.
- Avoid that persons get hit escaping air or bursting parts of the instrument.
- The system must be pressureless during maintenance work.



WARNING!

Voltage used for supply!

Any contact with energized parts of the product, may lead to an electrical shock which can lead to serious injuries or even death!

- Consider all regulations for electrical installations.
- The system must be disconnected from any power supply during maintenance work.
- Any electrical work on the system is only allowed by authorized qualified personal.

**ATTENTION!****Permitted operating parameters!**

Observe the permitted operating parameters, any operation exceeding this parameters can lead to malfunctions and may lead to damage on the instrument or the system.

- Do not exceed the permitted operating parameters.
- Make sure the product is operated in its permitted limitations.
- Do not exceed or undercut the permitted storage and operation temperature and pressure.
- The product should be maintained and calibrated frequently, at least annually.

General safety instructions

- It is not allowed to use the product in explosive areas.
- Please observe the national regulations before/during installation and operation.

Remarks

- It is not allowed to disassemble the product.
- Always use spanner to mount the product properly.

**ATTENTION!****Measurement values can be affected by malfunction!**

The product must be installed properly and frequently maintained, otherwise it may lead to wrong measurement values, which can lead to wrong results.

- Do not exceed the maximum operation temperature at the sensors tip.

Storage and transportation

- Make sure that the transportation temperature of the device is between -40 ... +90°C.
- For transportation it is recommended to use the packaging which comes with the device.
- Please make sure that the storage temperature of the device is between -40 ... +90°C.
- Avoid direct UV and solar radiation during storage.
- For the storage the humidity has to be < 90%, no condensation.

2 Registered Trademarks

SUTO®

Registered trademark of SUTO iTEC

MODBUS®

Registered trademark of the Modbus Organization, Hopkinton, USA

3 Application

The S020 Temperature Transmitter is a sensor which is designed to measure the temperature of liquid, vapour, compressed air and gases within the permissible operating parameters. These parameters can be found in the Technical Data section.

The S020 Temperature Transmitter is not developed to be used in explosive areas. For the use in explosive areas please contact the manufacturer.

The S020 Temperature Transmitter is mainly used in compressed air systems in an industrial environment.

4 Features

- Easy installation in compressed air systems.
- Measure the inlet / outlet temperature of dryers.
- Measure the outlet temperature of compressors.

5 Technical Data

5.1 General

CE	
Parameters	Standard unit temperature: °C
Principle of measurement	Resistance change
Sensor	PT 1000, class A
Measuring medium	Non-corrosive gases
Measuring range	-50°C ... +200°C
Ambient temperature	-40°C ... +90°C
Tube material	Stainless steel 1.4571
Protection class	IP65
Dimensions	See dimensional drawing below
Weight	80 g

5.2 Electrical Data

Power supply	16 ... 30 VDC
--------------	---------------


5.3 Output Signals

Analogue output	4 ... 20 mA, 2 wire loop powered
-----------------	----------------------------------

5.4 Accuracy

Accuracy	0.5 % of reading + 0.2 % FS
----------	-----------------------------

6 Dimensional Drawing

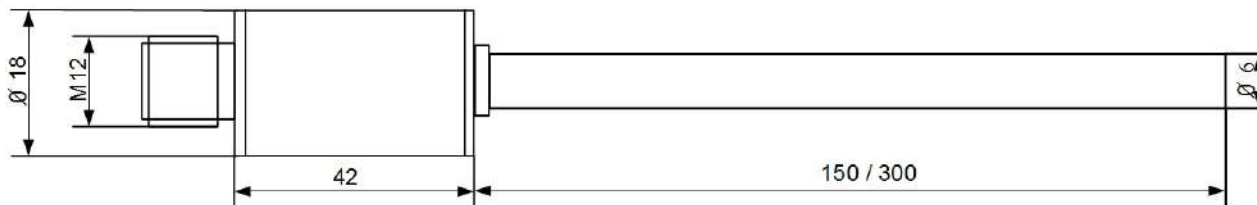

7 Determination of the Installation Point

In order to maintain the accuracy stated in the technical data, the Temperature Transmitter must be installed correctly. The sensor tip should not contact the inner wall of the pipe, which will lead to wrong measurement values. For further instructions, please read the next chapter carefully.

Please consider that enough space exists at your site for an adequate installation as described in this manual.



ATTENTION!

Wrong measurement is possible, if the Temperature Transmitter is not installed correctly.

- Careful attention must be paid to the insertion depth of the Temperature Transmitter. Not less than 2/3 of the Temperature Transmitter shaft should be inside of the pipe.
- The sensor tip may not contact the inner wall of the pipe.
- The Temperature Transmitter is for indoor use only! At an outdoor installation, the Temperature Transmitter must be protected from solar radiation and rain.
- It is strongly recommend not to install the Temperature Transmitter permanently in wet environment as it exists usually right after a compressor outlet.

8 Installation

Please make sure that all components listed below are included in your package.

Qty	Description	Item No.
1	S020 Temperature Transmitter	S693 0003 — 150 mm S693 0004 — 300 mm
1	Depending on orders: M12 plug or M12 cable	Plug: C219 0059 Cable: A553 0104/A553 0105
1	Instruction manual	No P/N

8.1 Installation Requirements

To install the S020, a nozzle and a compression fitting are needed.

- The inner thread must be G ½".
- The diameter of the hole must be > 6 mm, otherwise the shaft can not be inserted.

8.2 Installation Procedure

The following steps explain the procedure of an appropriate installation.

Install the S020

1. Screw the compression fitting tightly to the nozzle of the pipe.
2. Loosen the nut of the compression fitting.
3. Move the S020 slightly through the compression fitting into the pipe.
 - Not less than 2/3 of the S020 shaft should be inside of the pipe.
 - The sensor tip may not contact the inner wall of the pipe.
4. Screw the nut of the compression fitting.


Removal of the instrument

1. Loosen the nut of the compression fitting.
2. Pull out the S020 slowly.

8.3 Electrical Connection

The S020 is equipped with a M12 connector plug. The cable is connected to the S020 using the M12 connector.

Please refer to connection diagram below.

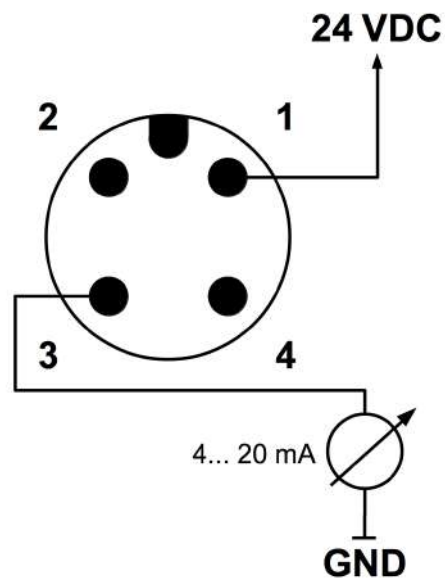

ATTENTION!

Do not screw the M12 plug using force. Otherwise, it may damage the connecting pins.

9 Signal Outputs

The S020 has an analog output range of 4 ... 20 mA. It is a 2 wire loop powered analog output. This output is scaled to:

- 4 mA = -50°C
- 20 mA = +200°C

10 Optional Accessories

10.1 Compression Fitting

There are different types of compression fittings available:

- Compression fitting 6 mm, G1/2", PTFE ring, 0.6 MPa (A554 6003)
- Compression fitting 6 mm, G1/2", metal ring, 1.6 MPa (A554 6004)

11 Calibration

The instrument is calibrated in the factory. The calibration date is printed on the certificate provided with the instrument. The accuracy of the instrument is limited by site conditions, such as oil, high humidity, or other impurities that can affect calibration and accuracy. It is recommended to contact the manufacturer to calibrate annually. Instrument warranty does not cover calibration services. Please note the last calibration date on the calibration certificate.

12 Maintenance

To clean the instrument and its accessories it is recommended to use moist cloth only.

13 Disposal or Waste



Electronic devices are recyclable material and do not belong in the household waste.

The instrument, the accessories and its packings must be disposed according to your local statutory requirements. The dispose can also be carried by the manufacturer of the product, for this please contact the manufacturer.

Jakarta

Komplek Gading Bukit Indah Blok V No. 23
Kelapa Gading - Jakarta Utara 14240
Indonesia
Telp : +62 21 2938 2790

Bandung

Taman Holis Indah Blok E4 No. 21
Kel. Cigondewah Kidul Kec. Bandung Kulon
Bandung, Jawa Barat 40214
Indonesia
Telp : +62 22 2057 3429

Solo

Jl. Raya Solo Sragen KM.15 Dukuh Nglarangan RT.03/RW.01
Kel.Kebak, Kec. Kebakramat, Kab.Karanganyar,
Jawa Tengah 57762
Indonesia
Telp : +62 271 601 2023

Workshop

Pergudangan Central Cakung Business Park
Blok D No. 11 Jl. Cakung Cilincing Timur KM 3
Jakarta Utara 14140
Indonesia